


# 1540CW

## ASJ FACING TAPE

**VentureTape® 1540CW is a white kraft/scrim/foil laminate (ASJ) coated with a cold weather acrylic pressure sensitive adhesive. Specifically designed for use as a vapor seal on ASJ faced duct board and pipe insulation, VentureTape 1540CW applies easily and excels in demanding temperature and humidity applications, providing superior performance and durability over a wide range of conditions.**

### Product Construction

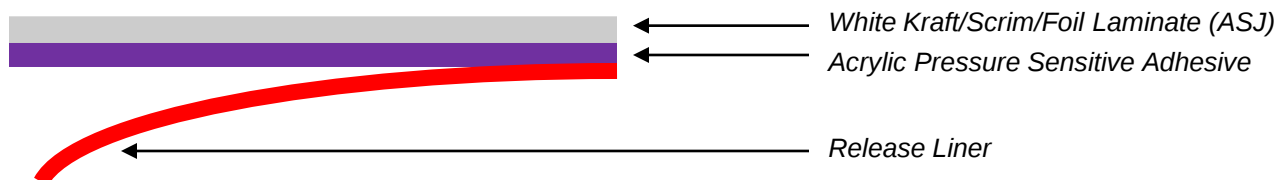

### Features & Benefits

- UL 723 Listed (5/0 Flame/Smoke Rating)  
UL file # R10984
- Facing used meets ASTM C1136, Type I, II, III, IV
- Specifically designed for cold weather; also excels in high heat and humidity conditions
- Tri-directionally reinforced 4 x 4 squares per inch fiberglass scrim, UL listed laminate
- High performance insulation tape is ideal for use as a vapor seal for on ASJ faced fiberglass duct board and pipe insulation
- In stock product available for immediate delivery

### Product Configurations

- Standard roll widths: 2", 3", 4", 5"
- Standard length: 50Y

**Contact Venture Tape today for a complete list of products or a free sample**

Toll Free North America 800-343-1076

From United Kingdom 0-800-962-957

From Australia 1-800-122-797

[www.venturetape.com](http://www.venturetape.com)

| Test                           | Typical Value     | Typical Value (Metric) | Test Method |
|--------------------------------|-------------------|------------------------|-------------|
| Product Thickness <sup>Ω</sup> | 10.8 mils         | 0.27 mm                | PSTC-133    |
| Peel Adhesion <sup>Δ</sup>     | 45 oz/in          | 12.5 N/25 mm           | PSTC-101    |
| Shear Adhesion                 | >24 hrs @ 2.2 psi | >24 hrs @ 15.2 kPa     | PSTC-107    |
| Tensile Strength               | 55 lb/in          | 248.6 N/25 mm          | PSTC-131    |
| Elongation                     | 35 %              | 35 %                   | PSTC-131    |
| WVTR                           | 0.02 perms        |                        | ASTM E96    |
| Emissivity                     | 0.9               |                        | ASTM E408   |
| Service Temperature            | -40 to 300 °F     | -40 to 149 °C          |             |

<sup>Ω</sup> - excluding liner

<sup>Δ</sup> - 20 minute dwell

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate; Venture Tape recommends that the purchaser test for fitness of use in all applications.

# VentureTape®

GTA - NHT, Inc.  
Venture Tape  
30 Commerce Rd., Rockland, MA 02370  
Tel 781-331-5900; Fax 781-871-0065  
800-343-1076 (U.S.A.), 800-544-1024 (Canada)  
Toll Free Fax 877-264-5490  
[www.venturetape.com](http://www.venturetape.com)

# GTA

TAPES & ADHESIVES  
a 3M Company